

MOTOR DE BATERIA
 MOTOR PARA BATERIAS
 MOTEUR POUR BATTANTES
 SWING GATE OPERATOR

SK4/SK6

230v

<7 m>

Epoxi
Resistance

120°



CE



SK4

SK6

Tensão / Voltaje / Tension / Voltage	V AC	230	230
Potência / Potencia / Puissance / Power	W	280	280
Intensidade / Absorción / Intensité / Absorption	A	1.7	1.7
Torque / Torque / Moment de force / Torque	N.m	1800	1800
Curso máx. / Carrera máx. / Course max. / Max. course	mm	400	600
Velocidade / Velocidad / Vitesse / Speed	cm/s	2.0	2.0
Peso máx. / Peso máx. / Poids max. / Max. weight	Kg	250	250
Largura máx. / Anchura máx. / Largeur max. / Max. length	m	2.5	3.5
Ciclos consecutivos / Ciclos consecutivos / Cycles consécutifs / Consecutive cycles	X	11	11
Índice de protecção / Índice de protección / Indice de protection / IP Code	(IEC 60529)	IP 54	IP 54
Temperatura / Temperatura / Température / Temperature	°C	-20 ~ +70	-20 ~ +70
Placa de controlo / Central de mando / Logique de commande / Control card	SkyMaster SKBT-230		

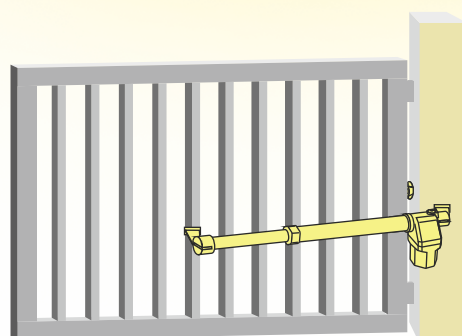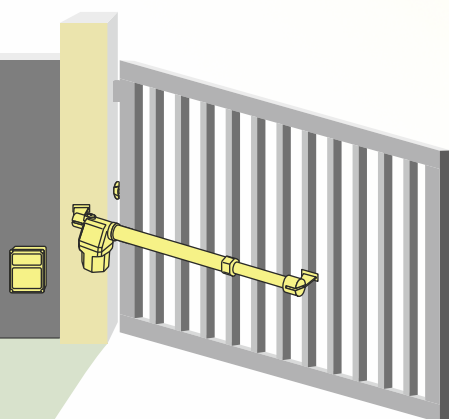

Motor para portões de batentes, de 1 ou 2 folhas. A solução mais robusta
 / Motor para puertas de batientes de una o dos hojas. La solución más robusta
 / Moteur pour portes battantes d'un ou deux vantaux. La solution plus robuste
 / Swing gate operator, for one or two leaves. The most powerful solution

Programação independente das folhas
 / Programación independiente de las hojas
 / Programmation indépendante des vantaux
 / Independent programming of the leaves



Tracção por 'sem-fim' em aço temperado e braço em inox
 / Tracción por 'sin fin' de acero templado y brazo de inox
 / Traction par 'sans fin' en acier trempé et bras en inox
 / Traction by hardened steel worm gear and stainless steel arm

Protecção térmica
 / Protección térmica
 / Protection thermique
 / Thermal protection

Desbloqueio de emergência manual
 / Desbloqueo manual de emergencia
 / Débrayage manuel d'urgence
 / Emergency manual declutch

Acabamento em epoxi anticorrosivo
 / Acabado epoxi anticorrosivo
 / Finition époxy anticorrosion
 / Anticorrosive epoxy finish

Abertura da folha até 120° e abrandamento
 / Apertura de la hoja hasta 120° y desaceleración
 / Ouverture des vantaux jusqu'à 120° et ralentissement
 / Opening range of leaf up to 120° and deceleration

Codificação Rolling Code anti-cópia
 / Codificación Rolling Code anticopia
 / Codage Rolling Code anti-copie
 / Anti-copy Rolling Code coding

Kit motor / Kit motor / Kit moteur / Operator's kit



Kit SK4	2 folhas 2 hojas 2 vantaux 2 leaves	02.424021
Kit SK4	1 folha, esquerdo 1 hoja, izquierdo 1 vantail, gauche 1 leaf, left	02.424015
Kit SK4	1 folha, direito 1 hoja, derecho 1 vantail, droite 1 leaf, right	02.424010
Kit SK6	2 folhas 2 hojas 2 vantaux 2 leaves	02.426021
Kit SK6	1 folha, esquerdo 1 hoja, izquierdo 1 vantail, gauche 1 leaf, left	02.426015
Kit SK6	1 folha, direito 1 hoja, derecho 1 vantail, droite 1 leaf, right	02.426010

Motor / Motor / Moteur / Operator

SK4	esquerdo (1 motor) izquierdo (1 motor) gauche (1 moteur) left (1 operator)	02.424095
SK4	direito (1 motor) derecho (1 motor) droite (1 moteur) right (1 operator)	02.424090
SK6	esquerdo (1 motor) izquierdo (1 motor) gauche (1 moteur) left (1 operator)	02.426095
SK6	direito (1 motor) derecho (1 motor) droite (1 moteur) right (1 operator)	02.426090



Fechadura eléctrica vertical
 Cerradura eléctrica vertical
 Serrure électrique verticale
 Electrical vertical lock
 12V

Outros acessórios

/ Otros accesorios
 / Autres accessoires
 / Other accessories

Fechadura eléctrica vertical	12V	02.276011
Cerradura eléctrica vertical Serrure électrique verticale Electrical vertical lock		
Fotocélulas de parede		02.400023
Fotocélulas de pared Photocélules murales Surface mount photocells		
Pirilampo 230V com antena		02.400010
Lámpara de destellos 230V con antena Feu clignotant 230V avec antenne Flashing light 230V with antenna		
Selector de chave		02.270213
Selector de llave Sélecteur à clé Keyswitch		